


# HQS-COB-10W-X Series

LED24V professional tape, 10W/m

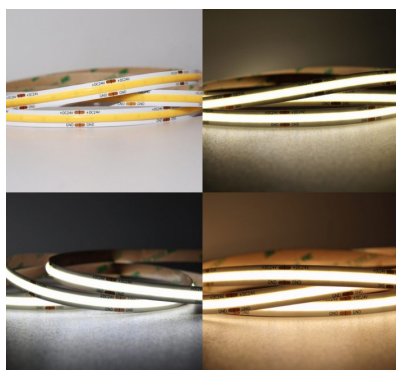

## ■ Application:

- Kitchen lighting
- Conference lighting
- Sign lighting
- Interior lighting of buildings

## ■ Features:

- Uniform lighting
- Easy installation and maintenance
- Elastic strap
- Angle of light diffusion (180°)
- Uniform light line and high luminous intensity

## ⊙ MODEL VERSIONS

HQS	-	COB	-	10W	-	X
Seria	-	Chip LED on board	-	Power per 1m	-	Colour
					-	X = W 6 500K
					-	X = NW 4 000K
					-	X = WW 3 000K

## ⊙ ELECTRICAL SPECIFICATION

MODEL	HQS-COB-10W-W	HQS-COB-10W-NW	HQS-COB-10W-WW
LED type		COB	
Number of diodes per 1m		512	
Supply voltage		24V DC	
Current and power consumption / 1m		420mA; 10W	
Current and power consumption / roll (5m)		2.1A 50W	
Colour temperature range	6 500K	4 000K	3 000K
Lighting angle		180 °	
Luminous flux (lm/W) [1mb]		120	
Luminous flux (lm/m)		1 200	
CRI		CRI ≥ 90	
Segmented cutting section		62.5mm	
Dimensions (L * W * H)		5000 * 8 * 1.5mm	

## ⊙ WORKING ENVIRONMENT

IP protection class	IP33
Operating temperature	-25°C ÷ +45°C
Storage temperature	-25°C ÷ +80°C

## ⊙ PACKAGING


Quantity (m/package)	5
Quantity (pack/carton)	60

# HQS-COB-10W-X Series

LED24V professional tape, 10W/m



## © MECHANICAL SPECIFICATION

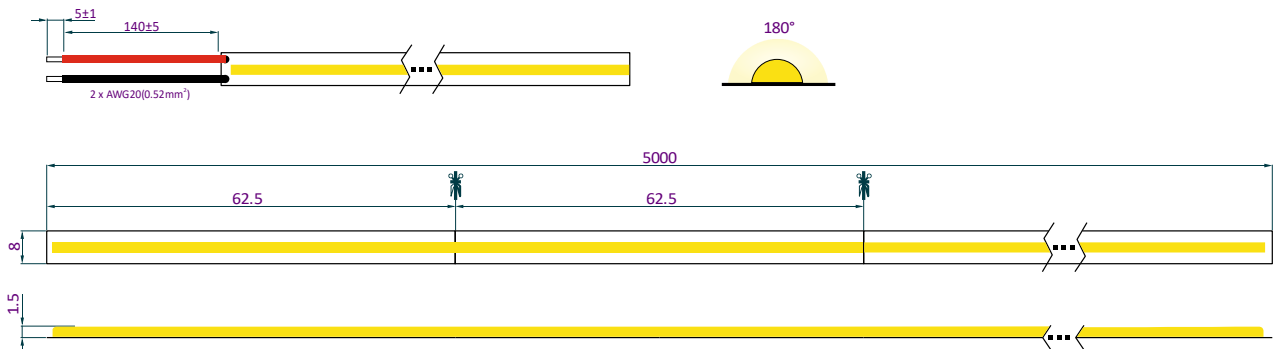

## © ZASILANIE

